



VEHICLE OVERVIEW

MARTIN JOSE DEL CASTILLO S.

MARCH 2, 2019

MC 660 MODEL IC

The ultimate long-load workhorse.

The MC-660 is the ideal carrier for long and heavy loads of up to 6,000 lbs.—even over long distances. Its fully customizable modular design features a low, long flatbed cargo deck and powerful four-wheel drive. Also available in unlimited configurations including our cab option, or with the single seat and half-cowl for full-length deck space on the right side. A rugged, multi-purpose vehicle offering safe and dependable performance, even when handling the heaviest loads.



Burden Carriers
Other Models : 48V


 PASSENGERS
2

 LOAD CAPACITY
3,000 lbs

 TOWING CAPACITY
6,000 lbs


 SPEED MPH
15 mph

 TURNING RADIUS
150"

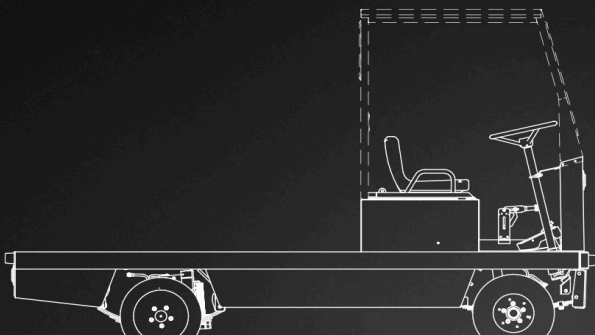

FEATURES

- Built-to-last all-steel unibody construction
- Heavy-duty powder paint & protection
- Smooth-ride wheels in multiple models and options
- Reinforced bolt-on front bumper
- Versatile, heavy-duty hitches

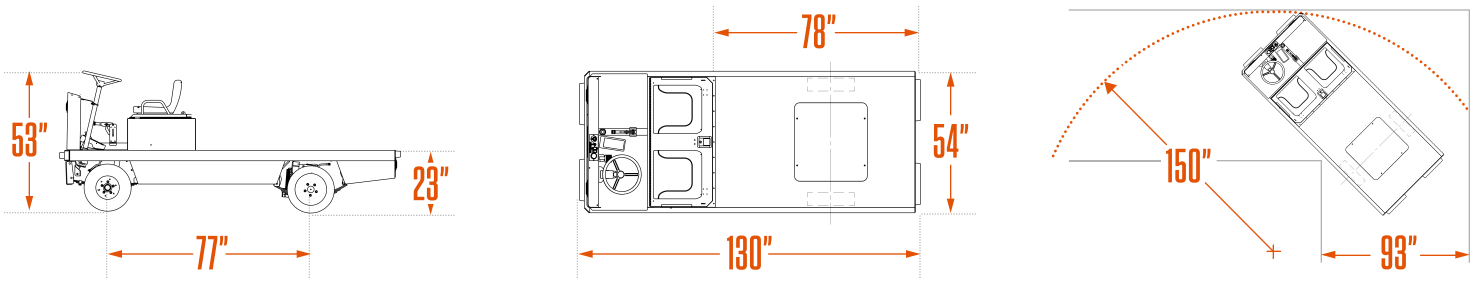

Dimensions

VEHICLE

Height	53"	1,346 mm
Length	130"	3,302 mm
Width	54"	1,372 mm
Wheel Base	77"	1,956 mm
Ground Clearance	n/a	n/a

DECK

Height	23"	584 mm
Width	54"	1,372 mm
Length	78"	1,981 mm

UNIT WEIGHT

With Batteries	n/a	n/a
Without Batteries	n/a	n/a

BATTERIES

Height	n/a	n/a
Length	n/a	n/a
Width	n/a	n/a
Weight - Min	n/a	n/a
Weight - Max	n/a	n/a

Performances

VEHICLE

Passengers	2	
Load Capacity	3,000 lbs	1,361 kg
Tow Capacity	6,000 lbs	2,722 kg
Drawbar Pull - Normal	n/a	n/a
Drawbar Pull - Ultimate	n/a	n/a
Speed MPH	15 mph	24 km/h
Turning Radius	150"	3,810 mm

Vehicle shown may have optional accessories and is provided for illustrative purposes only.
Specifications and standard equipment are subject to change without notice.

Specifications

POWERTRAIN

Motor	n/a
Controller	n/a
Drive Axle	Dual hydraulic wheel motors
Brakes	4-wheel hydraulic discs brakes, hand lever parking brake
Wheels	5.7x8 LRB pneumatic tires
Transmission	Hydrostatic pump
Suspension	Front and rear leaf spring with shock absorber suspensions
Starter	12-V positive engaging starter
Clutch	Automatic, automotive control
Engine	Kohler V-twin cylinders, fan-cooled, 4-cycle gas engine

ENERGY

Voltage	n/a
Battery	n/a
Charger	n/a
Alternator	25 amp flywheel alternator
Fuel	Unleaded regular gas only, 7 U.S. gallon tank capacity

CHASSIS

Body	12-G plate steel, 2x4 tubular frame
Color	Security orange or federal yellow
Lights	LED dual headlights & tail/brake lights

OPERATOR COMPARTMENT

Steering	Automotive steering wheel
Seats	Two bucket seats on slide adjusters
Indicators	Fuel gauge
Safety	Seat switch, neutral start switch, oil sentry, automatic engine shut down, reverse alarm
Accessories	Horn, reverse alarm, neutral start switch

Standards

Conforms to UL 558 and ANSI B56.8



POPULAR OPTIONS

GET THE IDEAL VEHICLE FOR THE JOB.
With unlimited configurations, we make customization quick, easy and affordable.

Cabs & Top Covers

G660-041 Steel cab & doors, wiper, rearview mirror, sound insulation

Decks

G660-081 96" deck length

Hitches

360-086 Clevis type hitch with safety spring

Performances

G660-08548 7,000 lbs capacity (includes solid rubber wheels, 8mph programming and 48" wide deck).
Not available with 54" W deck

Safety Features

660-026 Pole mounted strobe light

Seats

G660-049 Seat belts, retractable, two passengers

Wheels

660-074 Solid soft rubber wheels

The list above shows the most popular options for this vehicle. More options are available. To learn more about the MC - 660 - IC options, please contact your representative. Options, specifications and standard equipment are subject to change without notice.



Martin Jose Del Castillo S.
President

+52 662 210-7808 #104
mj.delcastillo@mmh.com.mx

Mex Material Handling
Los Mayos 13, Parque Industrial
Hermosillo (Sonora)
83299
Mexico



www.motrec.com